


## Product Designation

<b>Product Group:</b>	Polyamide power transmission belts
<b>Product Sub-Group:</b>	Leather flat belts
<b>Main Industry Segments:</b>	Various industries
<b>Belt Applications:</b>	Driving belt; Power transmission belt
<b>Special Features:</b>	Wear resistance
<b>Mode of Use/Conveyance:</b>	Power transmission

## Product Design (enlarged)

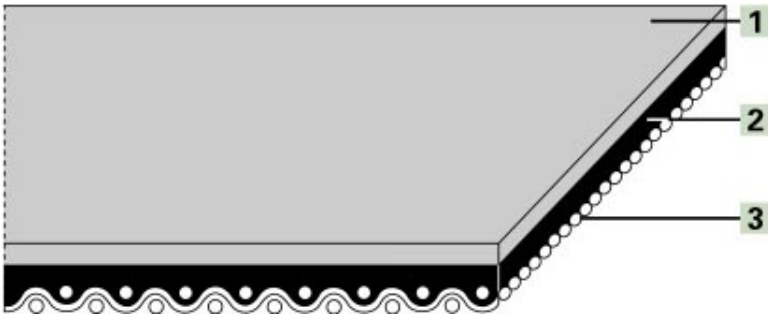

## Product Construction/Design

<b>1 Friction cover/Pulley side (Material):</b>	Chrome leather
<b>1 Friction cover/Pulley side (Surface structure):</b>	Leather structure
<b>1 Friction cover/Pulley side (Color):</b>	Light gray
<b>2 Traction Layer (Material):</b>	Polyamide (PA)
<b>3 Reverse cover (Material):</b>	Polyamide (PA) fabric
<b>3 Reverse cover (Surface structure):</b>	Rough structure
<b>3 Reverse cover (Color):</b>	Green

## Product Characteristics

<b>Drive determination:</b>	One-sided power transmission
<b>Antistatically equipped:</b>	No

## Technical Data

<b>Thickness:</b>	3.1 mm	0.12 in.
<b>Mass of belt (belt weight):</b>	3.0 kg/m <sup>2</sup>	0.61 lbs./sq.ft
<b>Pulley diameter (minimum):</b>	125 mm	5 in.
<b>Pulley diameter minimum with counter flexion:</b>	125 mm	5 in.
<b>Tensile force for 1% elongation (k1% after running in) per unit of width (Habasit standard SOP3-013):</b>	8 N/mm	46 lbs./in.
<b>Nominal peripheral force per unit of width:</b>	22 N/mm	126 lbs./in.
<b>Operating temperature admissible (continuous):</b>	Min -20 °C Max 80 °C	Min -4 °F Max 176 °F
<b>Seamless manufacturing width:</b>	450 mm	18 in.

All data are approximate values under standard climatic conditions: 23°C/73°F, 50% relative humidity (DIN 50005/ISO 554), and are based on the Master Joining Method.

## Additional Technical Information

<b>Chemical Resistance Class:</b>	1 (These indications are not guarantees of properties)
<b>Installation and Handling Instructions:</b>	Observe the indications of the machine handbook from the machine manufacturers.
<b>Limitations:</b>	This product has not been tested according to ATEX standards (atmospheres with explosion risk - ATEX 95 regulation or EU directive 94/9) and therefore is subject to user's analysis in the respective environment.

## Storage

For details consult 'Storage and handling requirements for belts and machine tapes' or contact Habasit.  
Protect belts from sunlight/UV-radiation/dust and dirt. Store spare belts in a cool and dry place and if possible in their original packaging.

## Legend

<b>*</b>	No calculation Value
<b>3)</b>	CLA: Coordination of the centre line-average value Ra (in the US also Arithmetical Average (AA)) to the maximum peak to valley height Rt for surfaces manufactured by chip removal.
<b>8)</b>	Due to high coefficient of friction of running/pulley side, the suitability for use on slider beds is limited
<b>EEC</b>	European Economic Community
<b>NA</b>	Not available
<b>NAP</b>	Not applicable

## Product Liability, Application Considerations

If the proper selection and application of Habasit products are not recommended by an authorized Habasit sales specialist, the selection and application of Habasit products, including the related area of product safety, are the responsibility of the customer. All indications / information are recommendations and believed to be reliable, but no representations, guarantees, or warranties of any kind are made as to their accuracy or suitability for particular applications. The data provided herein are based on laboratory work with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experiences can lead to modifications and changes within a short time without prior notice.  
BECAUSE CONDITIONS OF USE ARE OUTSIDE OF HABASIT'S AND ITS AFFILIATED COMPANIES CONTROL, WE CANNOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS MENTIONED HEREIN. THIS ALSO APPLIES TO PROCESS RESULTS / OUTPUT / MANUFACTURING GOODS AS WELL AS TO POSSIBLE DEFECTS, DAMAGES, CONSEQUENTIAL DAMAGES, AND FURTHER-REACHING CONSEQUENCES.