

HabiPLAST[®] Profiles

MB 02S




Your Source For Habasit
Belting And Chain

www.StilesEnterprises.com • 1-800-325-4232

Description

Extruded PE profile with a very low coefficient of friction and high resistance to chemical agents. Used as a sliding support for plastic modular belts and chains, or as a guiding aid for various purposes.

This is used in a wide range of industries such as bottling, packaging, materials handling, and food processing.

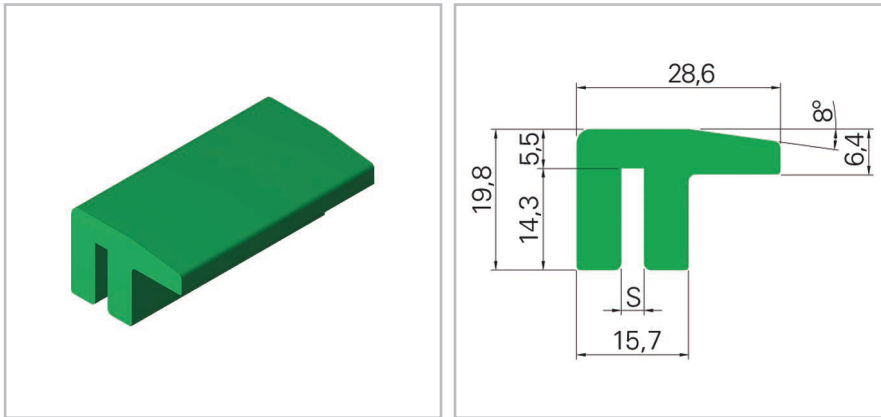

Product data

Habasit code	s	Material	Color	Packaging unit
	mm			
MB 02S-X	2.2	UHV	green	Bar
MB 02S-X	2.2	UHR	black	Bar
MB 02S-X	2.2	UHV	white	Bar
MB 02S-A	2.7	UHV	green	Bar
MB 02S-A	2.7	UHR	black	Bar
MB 02S-A	2.7	UHV	white	Bar
MB 02S-B	3.2	UHV	green	Bar
MB 02S-B	3.2	UHR	black	Bar
MB 02S-B	3.2	UHV	white	Bar
MB 02S-C	4.5	UHV	green	Bar
MB 02S-C	4.5	UHR	black	Bar
MB 02S-C	4.5	UHV	white	Bar
MB 02S-D	5.2	UHV	green	Bar
MB 02S-D	5.2	UHR	black	Bar
MB 02S-D	5.2	UHV	white	Bar

Standard material: Habiplast[®] UHV green and white, and UHR black. Other materials are available on request.

Standard bar lengths are 3 and 6 m.

For detailed material properties and other colors please contact your Habasit representative.

Note: All data are approximate values under standard climatic conditions: 23 °C / 73 °F, 50% relative humidity (according to DIN 50005 / ISO 554).