


## Description

Machined PE profile with a high molecular weight used as a sliding support for vertical roller chains. With its very good wear and chemical resistance, and low noise properties, this works well with all types of machinery.

This is used in a wide range of industries such as bottling, packaging, materials handling, and food processing.

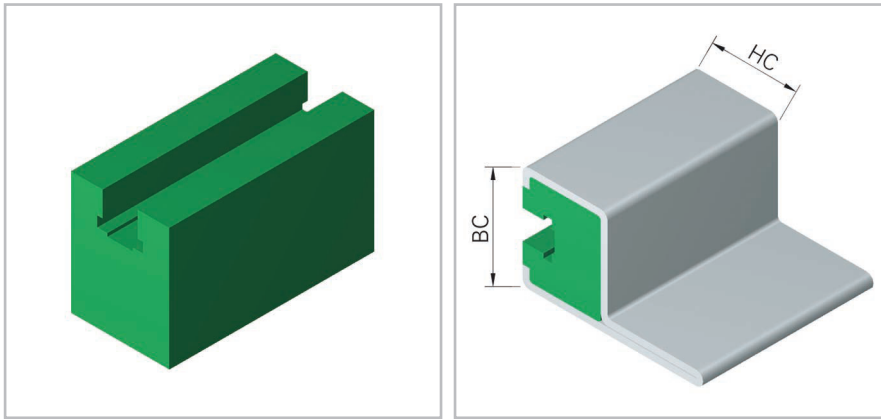

## Product data

Habasit code	Chain	ISO 606 (DIN 8187)	B	H	b
			mm	mm	mm
BL-01	3/8"x7/32"	06 B-1	20	25	9.3
BL-05	1/2"x5/16"	08 B-1	24	30	12.8
BL-09	5/8"x3/8"	10 B-1	30	35	15.4
BL-15	3/4"x7/16"	12 B-1	40	35	16.9
BL-18	1"x17 mm	16 B-1	40	45	24.4
BL-21	1 1/4"x3/4"	20 B-1	50	50	27.5
BL-24	1 1/2"x1"	24 B-1	60	60	36.5
BL-25	1 3/4"x31 mm	28 B-1	60	70	41.5
BL-30	2"x31 mm	32 B-1	70	75	44.5

Habasit code	b1	b2	h	h1	h2
	mm	mm	mm	mm	mm
BL-01	6.6	4.0	5.6	8.7	10.0
BL-05	8.7	5.0	7.6	11.5	13.5
BL-09	10.4	6.0	9.5	13.5	14.8
BL-15	12.3	7.0	11.5	15.9	17.5
BL-18	16.1	9.0	16.1	25.7	26.8
BL-21	19.3	11.0	19.4	29.3	31.2
BL-24	25.7	16.0	25.2	38.2	40.1
BL-25	28.3	17.0	30.8	46.9	48.9
BL-30	29.6	19.0	30.8	47.3	53.0

Standard material: Habiplast<sup>®</sup> UHR/G (green). Other materials are available on request.

Standard length is 3 m. Other lengths up to max. 6 m are available on request.

Metal profile is not included - please order separately.

For detailed material properties and other colors please contact your Habasit representative.

Note: All data are approximate values under standard climatic conditions: 23 °C / 73 °F, 50% relative humidity (according to DIN 50005 / ISO 554).