


Description

Machined PE curve track with a very low coefficient of friction and high wear resistance. Used as a guide and sliding support for HabaCHAIN[®] slat and conveyor plastic chains.

This is used in a wide range of industries such as bottling, packaging, materials handling, and food processing.

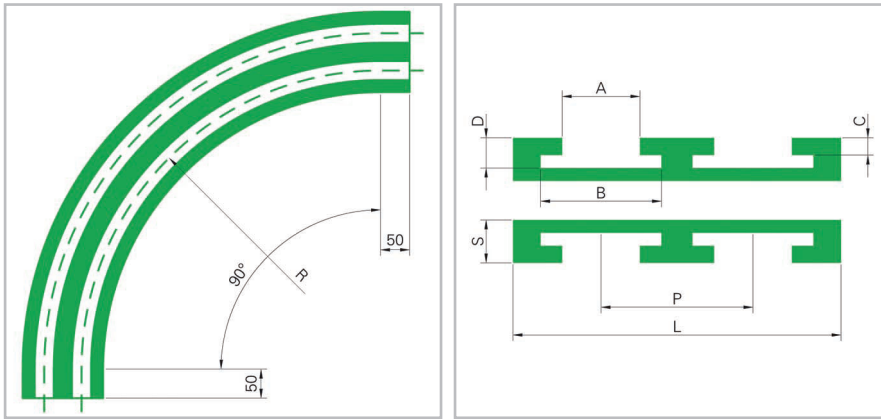

Product data

Habasit code	Chain	A	B	C	D	S
		mm	mm	mm	mm	mm
CT880K325R500T1	879T K0325 880T K0325	45	70	10	175	25
CT880K325R500T2	879T K0325 880T K0325	45	70	10	175	25
CT880K325R500T3	879T K0325 880T K0325	45	70	10	175	25
CT880K325R610T1	879T K0325 880T K0325	45	70	10	175	25
CT880K325R610T2	879T K0325 880T K0325	45	70	10	175	25
CT880K325R610T3	879T K0325 880T K0325	45	70	10	175	25
CT880K325R800T1	879T K0325 880T K0325	45	70	10	175	25
CT880K325R800T2	879T K0325 880T K0325	45	70	10	175	25
CT880K325R800T3	879T K0325 880T K0325	45	70	10	175	25
CT880K325R1000T1	879T K0325 880T K0325	45	70	10	175	25
CT880K325R1000T2	879T K0325 880T K0325	45	70	10	175	25
CT880K325R1000T3	879T K0325 880T K0325	45	70	10	175	25

Habasit code	R	L	N° of ways	P
	mm	mm		mm
CT880K325R500T1	500	100	1	-
CT880K325R500T2	500	190	2	88
CT880K325R500T3	500	280	3	88
CT880K325R610T1	610	100	1	-
CT880K325R610T2	610	190	2	88