


**Description**

Machined PE curve track with a very low coefficient of friction and high wear resistance. Used as a guide and sliding support for HabaCHAIN<sup>®</sup> slat and conveyor plastic chains.

This is used in a wide range of industries such as bottling, packaging, materials handling, and food processing.

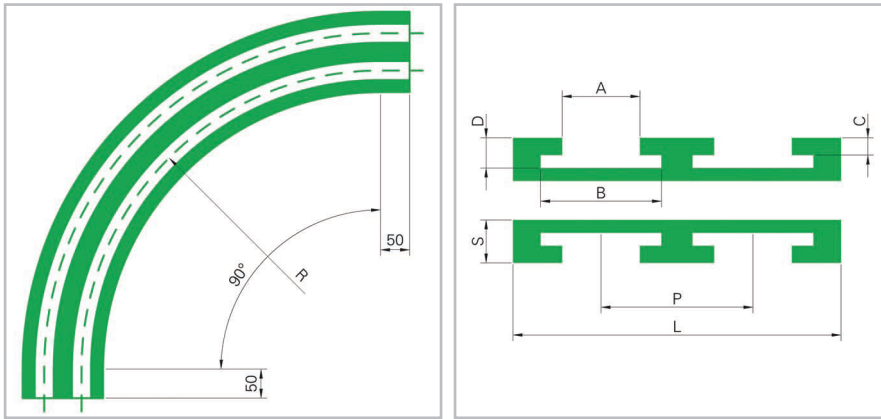

**Product data**

Habasit code	Chain	A	B	C	D	S
		mm	mm	mm	mm	mm
CT880K450R500T1	879T K0450 880T K0450	45	70	10	175	25
CT880K450R500T2	879T K0450 880T K0450	45	70	10	175	25
CT880K450R610T1	879T K0450 880T K0450	45	70	10	175	25
CT880K450R610T2	879T K0450 880T K0450	45	70	10	175	25
CT880K450R800T1	879T K0450 880T K0450	45	70	10	175	25
CT880K450R800T2	879T K0450 880T K0450	45	70	10	175	25
CT880K450R1000T1	879T K0450 880T K0450	45	70	10	175	25
CT880K450R1000T2	879T K0450 880T K0450	45	70	10	175	25

Habasit code	R	L	N° of ways	P
	mm	mm		mm
CT880K450R500T1	500	130	1	-
CT880K450R500T2	500	250	2	120
CT880K450R610T1	610	130	1	-
CT880K450R610T2	610	250	2	120
CT880K450R800T1	800	130	1	-
CT880K450R800T2	800	250	2	120
CT880K450R1000T1	1000	130	1	-
CT880K450R1000T2	1000	250	2	120

Standard material: HabiPLAST<sup>®</sup> UHR/B (black). Other materials are available on request.

For detailed material properties and other colors please contact your Habasit representative.