

HabasitLINK[®]

M5014 Nub Top 2"



Your Source For Habasit
Belting And Chain



www.StilesEnterprises.com • 1-800-325-4232

Description

- 0% open area
- Solid plate
- Non-adhesive because of less contact surface
- Open hinge, easy to clean
- Standard indent 37.5 mm (1.5")
- Rod diameter 7 mm (0.27")
- Food approved materials available

Available accessories

- Flights and scoops
- Sideguards
- Hold down devices

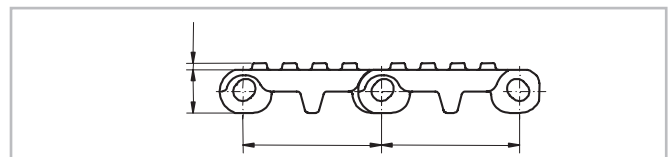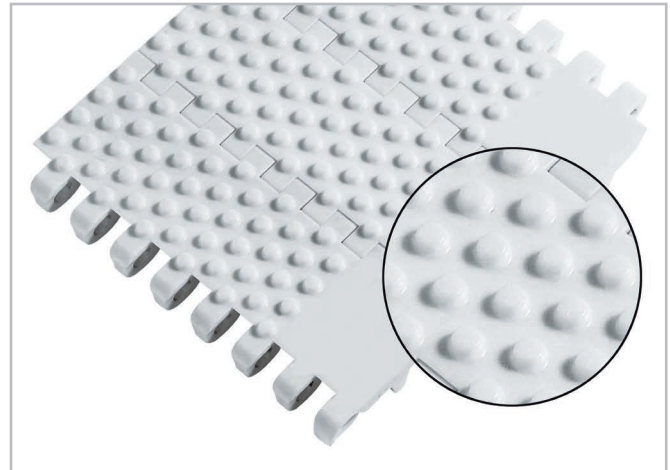

Belt data

Belt material		PP		PE		POM	
Rod material		PP	PA	PE	PA	PE	PA
Nominal tensile strength F' _N straight run	N/m	18000	18000	10000	10000	18000	30000
	lb/ft	1233	1233	685	685	1233	2055
Temperature range	°C	5 - 105	5 - 105	-70 - 65	-46 - 65	-40 - 65	-40 - 93
	°F	40 - 220	40 - 220	-94 - 150	-50 - 150	-40 - 150	-40 - 200
Belt weight m _B	kg/m ²	9.2	9.2	9.6	9.6	13.9	13.9
	lb/sqft	1.89	1.89	1.97	1.97	2.85	2.85

Diameter of idling rollers (minimum)		Diameter of support rollers (minimum)		Diameter for gravity take-up and center drive rollers (minimum)		Backbending radius for elevators without sideguards or hold down devices (minimum)		Backbending radius for elevators with sideguards or hold down devices (minimum)	
mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
90	3.5	100	4	150	6	150	6	250	10

Use the largest possible backbending radius for elevators with side guards or hold down devices.

Standard range of belt widths b₀

mm (nom.)	225	300	375	450	525	600	675	750	825	900	975	1050	1125	1200	etc.
inch (nom.)	9	12	15	18	21	24	27	30	33	36	39	42	45	48	etc.

Real belt widths are in most cases 0.1% to 0.3% smaller.

Standard belt widths in increments of 75 mm (3"). Non-standard widths are offered in increments of 18.75 mm (0.74"). Smallest possible width 112.5 mm (4.42").

For detailed material properties refer to the HabasitLINK[®] Engineering Guidelines or contact your Habasit representative.

The nominal tensile strength is valid for 23 °C (73 °F). The admissible tensile force depends on the operating temperature near the drive sprockets. Within the temperature range allowed, the admissible tensile force may vary from 100% to 20% of the nominal tensile strength. For detailed information and correct calculation of effective tensile force refer to the Calculation Guide in the HabasitLINK[®] Engineering Guidelines.