


KVP[®] Sprockets – 1/2" Pitch Belting HDS605 ST, HDS605 TT



Your Source For Habasit
Belting And Chain

www.StilesEnterprises.com • 1-800-325-4232

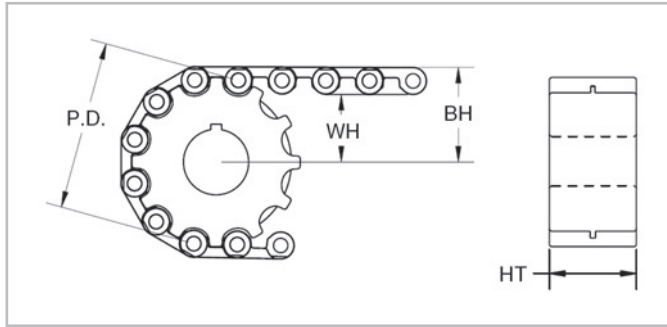

Machined sprocket

Sprocket part number	Number of teeth	(PD) Nominal pitch diameter		(WH) Shaft center to top of wearstrip		(BH) Shaft center to top of belt		(HT) Hub thickness	
		inch	mm	inch	mm	inch	mm	inch	mm
HDS70512	12	1.93	49	0.79	20	1.10	28	1	25
HDS70515	15	2.40	61	1.02	26	1.33	34	1	25
HDS70520	20	3.20	81	1.42	36	1.73	44	1	25
HDS70536	36	5.74	146	2.69	68	3.00	76	1	25

Split sprockets and other tooth sizes are available. Standard machined sprocket material is UHMW, Nylon and Urethane are available. Please contact your local partner.

Sprocket part number	Available bore size															
	1/2"	3/4"	20 mm	25 mm	1"	1" sq.	30 mm	1-1/4"	1-7/16"	1-1/2"	1-1/2" sq.	40 mm	40 mm sq.	1-15/16"	50 mm	2"
HDS70512						-		-	-	-	-	-	-	-	-	-
HDS70515						-				-	-	-	-	-	-	-
HDS70520										-	-	-	-	-	-	-
HDS70536																

All bore sizes are round bore unless designated square (sq.).