

# KVP<sup>®</sup> Straight 1-1/2" Pitch Belting IS615-S (All-In-One)






Your Source For Habasit  
Belting And Chain

www.StilesEnterprises.com • 1-800-325-4232

## Description

- 1-1/2 inch pitch
- 75% open area
- Food approved materials
- Bi-directional
- Connecting rod diameter = 0.188 inch (4.8 mm)
- Standard belt width increments = 3 inch (76.2 mm) nominal, starting from 7.25 inches (184.2 mm)
- Non-standard widths available in 5/8 inch (15.9 mm) increments from 4 inches (101.6 mm) upon request
- Material selection may affect belt width — please contact your local partner for actual dimensions

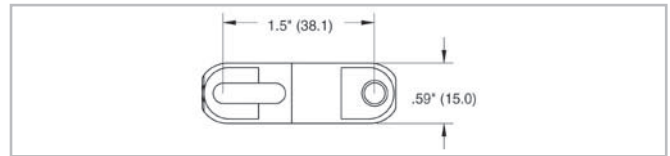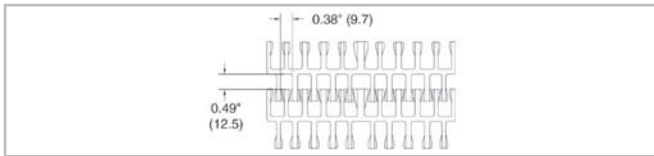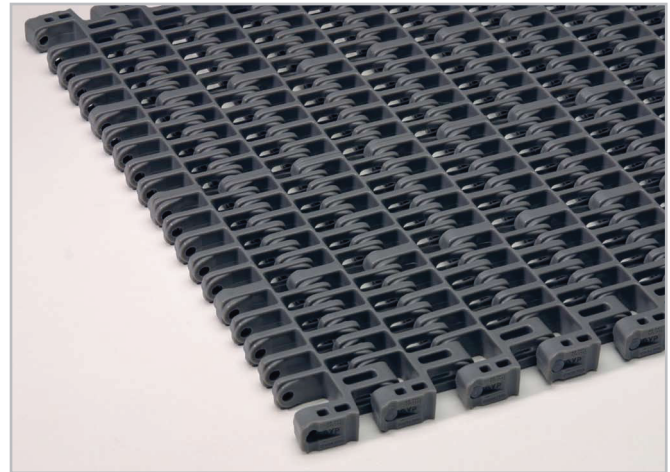

## Belt data

Belt material		PP	PE	POM	Nylon (PA 66)
Rod material		PP	PE	PP	
Nominal tensile strength F <sub>N</sub> straight run	N/m	14593	11675	21890	21890
	lb/ft	1000	800	1500	1500
Temperature range	°C	5 - 105	-70 - 65	5 - 93	5 - 118
	°F	40 - 220	-94 - 150	40 - 200	40 - 245
Belt weight m <sub>B</sub>	kg/m <sup>2</sup>	5.8	6.0	8.7	7.4
	lb/sqft	1.19	1.22	1.83	1.53
Standard belt color		gray	white	blue/off-white	dark gray

Additional belt colors and materials available, abrasive resistant Nylon (Polyamide) rods available – contact your local partner.

## Belt accessories

<p><b>Hold down tabs</b></p>	<p><b>Inserts</b> Note: Inserts may affect belt pull — please contact your local partner.</p>	<p><b>Rollerbelt</b></p>	<p><b>Standard flights</b> Standard flights are available in 1", 2", and 3" heights. Standard flight indent is 1-1/4" or greater from outside edge of belt.</p>	<p><b>Sideplates</b> Sideplates are available in standard 1" and 3" heights. Note: Sideplates must be indented a minimum of 1" from outside edge of belt.</p>
------------------------------	---	--------------------------	---	---