

HabasitLINK[®]

M2544 Tight Radius 1" MTW






Your Source For Habasit
Belting And Chain

www.StilesEnterprises.com • 1-800-325-4232

Description

- Mold to width radius belt
- For radius and straight conveying, ideal for applications with limited space
- Collapse factor:
 - M2544K04: 1.25
 - M2544K06: 1.32
- Open area: 38 % (M2544K04), 32 % (M2544K06)
- Open contact area: 64 %
- largest opening (belt edge):
 - 4" width: 7.6 mm x 14.5 mm (0.30" x 0.57")
 - 6" width: 10.0 mm x 12.8 mm (0.38" x 0.50")
- largest opening (middle of belt) for 4" and 6":
 - 7.6 mm x 10.6 mm (0.30" x 0.39")
- Excellent for cooling and draining
- Easy to clean
- Food approved materials available
- Rod diameter 5 mm (0.2")

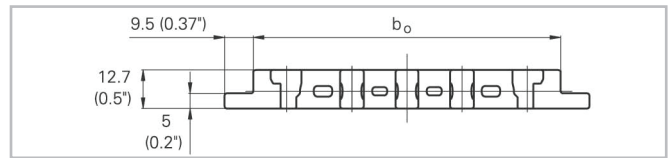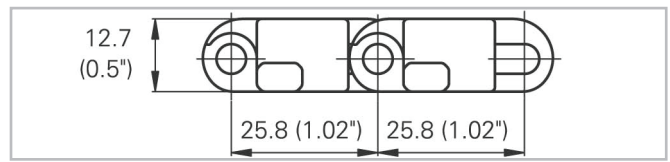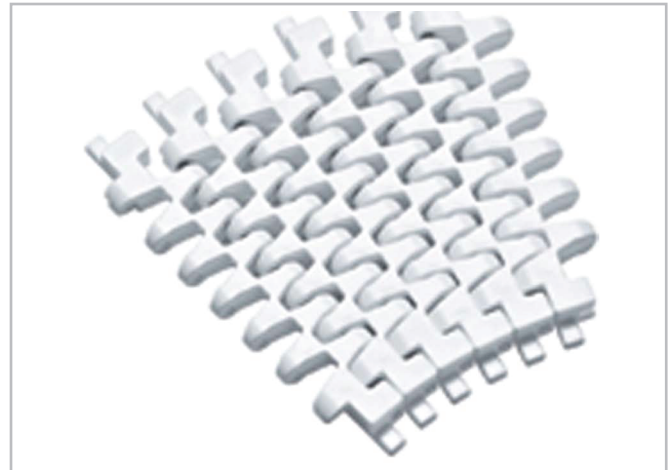

Belt data

	Nominal belt width b_o		Belt material	Rod material	Nominal tensile strength F_N straight run		Nominal tensile strength F_N in curve ⁽¹⁾		Belt weight m_b	
	mm	inch			N	lbf	N	lbf	kg/m	lb/ft
M2544K04	101.4	4.0	POM +JM	PA	1500	338	1000	225	0.87	0.58
M2544K04	101.4	4.0	PP	PA	1200	270	600	135	0.60	0.40
M2544K04	101.4	4.0	PP	POM	1200	270	600	135	0.60	0.40
M2544K06	152.2	6.0	POM +JM	PA	2500	563	1000	225	1.29	0.87
M2544K06	152.2	6.0	PP	PA	1800	404	600	135	0.87	0.58
M2544K06	152.2	6.0	PP	POM	1800	404	600	135	0.87	0.58

Real belt widths are in most cases 0.1% to 0.3% smaller.

Diameter of idling rollers (minimum)		Diameter of support rollers (minimum)		Diameter for gravity take-up and center drive rollers (minimum)		Backbending radius for elevators without sideguards or hold down devices (minimum)	
mm	inch	mm	inch	mm	inch	mm	inch
40	1.6	50	2	100	4	150	6

Temperature range

Module material	Rod material	Temperature range	
POM+JM	PA	-40 °C to +93 °C	-40 °F to +200 °F
PP	PA	+5 °C to +105 °C	+40 °F to +220 °F
PP	POM	+5 °C to +93 °C	+40 °F to +200 °F

For detailed material properties refer to the HabasitLINK[®] Engineering Guidelines or contact your Habasit representative.