

HabasitLINK[®] Spiral 1-1/2" Pitch Belting IS615-R (All-In-One)






Your Source For Habasit
Belting And Chain

www.StilesEnterprises.com • 1-800-325-4232

Description

- 1-1/2 inch pitch
- Belt turning radius equals 2.2 times the nominal belt width up to 24 inches (609.6 mm)
- Belt turning radius equals 2.5 times the nominal belt width over 24 inches (609.6 mm)
- 75% open area
- Built to USDA & FDA standards
- Bi-directional
- Connecting rod diameter = 0.188 inch (4.8 mm)
- Standard belt width increments = 3 inch (76.2 mm) nominal, starting from 7.25 inches (184.2 mm)
- Non-standard widths available in 5/8 inch (15.9 mm) increments starting at 5 inches (127 mm) upon request
- Material selection may affect belt width — please contact your local partner for actual dimensions

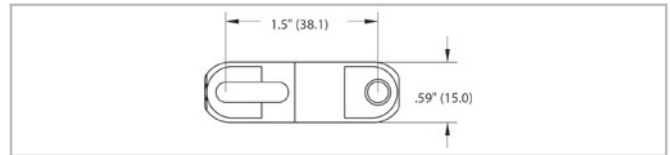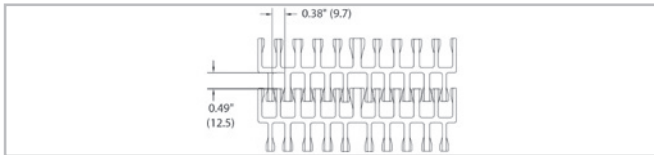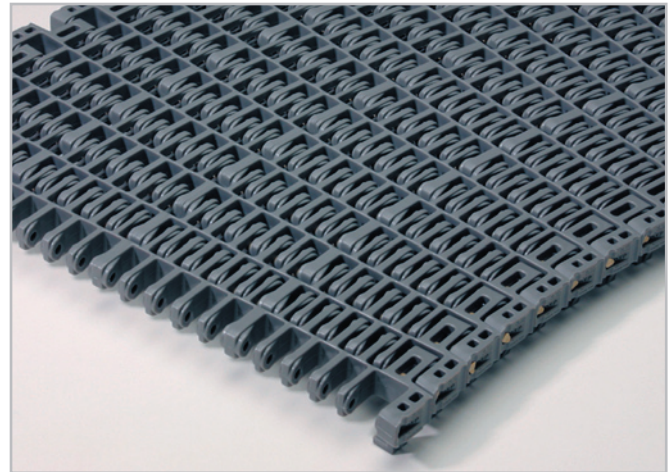


Belt data

Belt material		PP	PE	POM	Nylon (PA 66)
Rod material		Nylon (PA)	POM	Nylon (PA)	
Nominal tensile strength F_N in curve ⁽¹⁾	N	1112	845	1779	1779
	lbf	250	190	400	400
Temperature range	°C	10 - 99	-40 - 66	-40 - 93	-40 - 118
	°F	50 - 210	-40 - 150	-40 - 200	-40 - 245
Belt weight m_B	kg/m ²	5.8	6.0	8.7	7.4
	lb/sqft	1.19	1.22	1.83	1.53
Standard belt color		gray	white	off-white	gray

Additional belt colors and materials available, abrasive resistant Nylon (Polyamide) rods available – contact your local partner.

Belt accessories

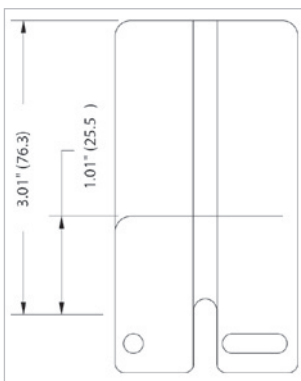

Sideplates

Note: Sideplates must be indented a minimum of 1-1/4" from the outside edge of belt.