

KVP[®] Sprockets – 3/4" Pitch Belting

106 CL, 106 10, 106 22, 106 RT, 106 V




Your Source For Habasit
Belting And Chain


www.StilesEnterprises.com • 1-800-325-4232



Machined sprocket



Machined split sprocket

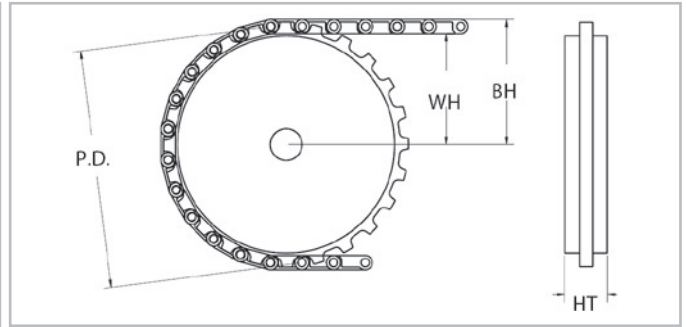

Sprocket part number	Number of teeth	(PD) Nominal pitch diameter		(WH) Shaft center to top of wearstrip		(BH) Shaft center to top of belt		(HT) Hub thickness	
		inch	mm	inch	mm	inch	mm	inch	mm
SB106PEU7	7	1.73	44	0.7	18	1.03	26	1.0	25
SB106PEU10	10	2.43	62	1.05	27	1.38	35	1.0	25
SB106PEU14	14	3.37	86	1.52	39	1.85	47	1.0	25
SB106PEU16	16	3.84	98	1.75	44	2.08	53	1.0	25
SB106PEU24	24	5.75	146	2.71	69	3.04	77	1.0	25
STB106PEU24	24	5.75	146	2.71	69	3.04	77	1.0	25
SB106PEU25	25	5.98	152	2.82	72	3.15	80	1.0	25
STB106PEU25	25	5.98	152	2.82	72	3.15	80	1.0	25

SB = solid body, STB = split body

Split sprockets and other tooth sizes are available. Standard machined sprocket material is UHMW, Nylon and Urethane are available. Please contact your local partner.

Sprocket part number	Available bore size														
	20 mm	3/4"	25 mm	25 mm sq.	1"	1" sq.	30 mm	1-1/4"	1-7/16"	1-1/2"	1-1/2" sq.	40 mm	40 mm sq.	2" sq.	2-1/2" sq.
SB106PEU7			-	-	-	-	-	-	-	-	-	-	-	-	-
SB106PEU10															
SB106PEU14															
SB106PEU16															
SB106PEU24															
STB106PEU24														-	-
SB106PEU25															
STB106PEU25														-	-

SB = solid body, STB = split body

All bore sizes are round bore unless designated square (sq.).